

# TRBOnet Swift A100

## Radio-over-IP Gateway




HARDWARE SOLUTIONS

5IF4XGUBUFXBZBSBDLNPVOUBMMOPFTPMVUPPO3P\*1OUFSGBDFBOEDPOUSPMTUBUPOSBEU  
 UIBUFOBCMFTBTZUFNPXOFSDPPOOFDU53#OFU#UFSTFPS53#OFU1-64UPF#BMMZ  
 SFNPUFTWFTXWIPVUOTUBMM#BOBEEWPOBMRV#FOU5IFBUXBZPVUFTWDFBOEEBUBGSPN  
 BOEUPPOFPSNBOZ3#OFU4FS#TP#\*1OFUXPSLT

5IF4XGUTB6SBDLNPVOUVOWUIBUJFBTZPOTUBMMBOENB#UB#5IBOLTUPIFSVFE  
 EFT#UIFBUXBZSGPSNTFDFMMFOUM#IBSTIDPOEWPOT

### Remote Control Room

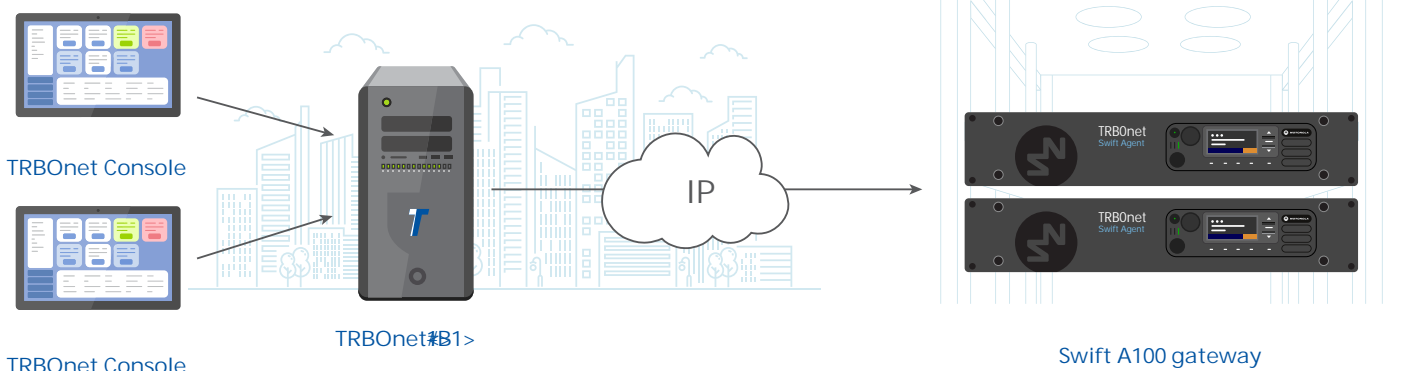


\*the radio must be purchased separately

## FEATURES

- ✓ Compatible with MOTOTRBO radios: DM4000 (EMEA), XPR 5000 (NAR), DGM 5000, DGM 8000 (LACR), and XiR M8600i, XiR M8600, XiR M6660 (APAC)\*
- ✓ Supports:
  - MOTOTRBO digital voice and data communications
  - MOTOTRBO analogue mode
- ✓ Support for up to 8 TRBOnet Servers
- ✓ Self-diagnostics and alarm notification over IP
- ✓ Support for backup battery units
- ✓ 4 input/output contacts for external hardware such as sensors, etc.
- ✓ Remote configuration
- ✓ Remote channel change

\*the radio must be purchased separately

## Interface

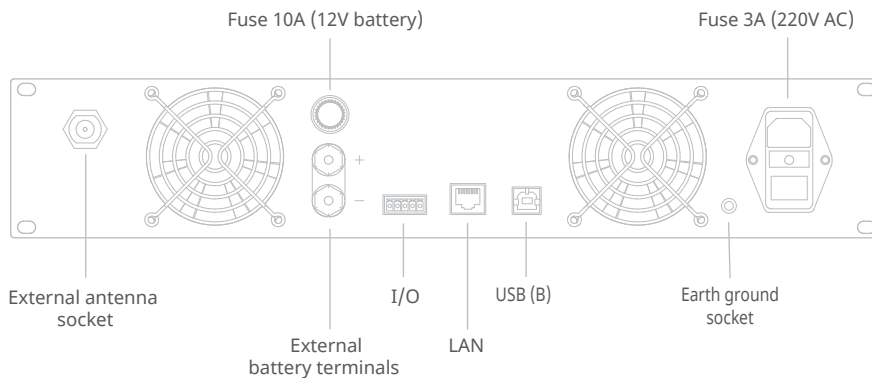

## BENEFITS

- + Monitor remote sites from a central location
- + Connect multiple sites over wide geographical areas
- + No sound card is needed to route voice calls
- + Can handle high latency networks (up to 3000ms)
- + Smooth analogue-to-digital migration
- + Enables channel patching
- + Ease of rack mounting with all in one design

## SPECIFICATION

### Dimensions

485 x 370 x 88 mm

### Weight

7 kg

### Operation temperature

-10 °C to +45 °C

### Relative humidity, max

85% at +40 °C

### Power input voltage

100-240 V AC

### Emergency power supply (reserve battery)

12-14 V DC

### Network connection

RJ45, Ethernet 10/100Base-T, 10/100 Mbit/s

## Sales & Support

For Sales & Support please contact your local TRBOnet dealer or visit [www.trbonet.com](http://www.trbonet.com) for a complete list of dealers in your region.

EMEA

+44 203 6080598

Americas

+ 1 872 222 8726

APAC

+61 28 6078325

[www.trbonet.com](http://www.trbonet.com) | [info@trbonet.com](mailto:info@trbonet.com)

