

## AXIS Q1922/-E Thermal Network Cameras

Superior detection and wide range coverage.



- > Thermal imaging for IP-Surveillance
- > Multiple lens options
- > VGA detection quality
- > Easy integration of intelligent video
- > Power over Ethernet
- > Full duplex audio

AXIS Q1922/-E Thermal Network Cameras are a perfect complement to any network video system that needs to secure an area or a perimeter 24 hours a day, seven days a week. The cameras use thermal imaging, which allows users to detect people, objects and incidents in complete darkness and difficult conditions such as smoke, haze, dust and light fog.

AXIS Q1922 is intended for indoor environments, while AXIS Q1922-E is an out-of-the-box, outdoor-ready model that is designed to withstand harsh weather conditions.

A resolution of 640x480 (VGA) and a range of lenses make it possible to optimize detection performance to meet high security application requirements. The high resolution, the advanced software processing and a frame rate of up to 30 fps improve thermal image quality, providing more pixels on target and enhancing the possibility to efficiently integrate intelligent video applications.

Since thermal cameras are less sensitive to problems with light conditions and shadows, they can achieve higher accuracy than conventional cameras in most intelligent video applications.


AXIS Q1922/-E cameras offer motion detection, audio detection, and detection of tampering attempts. The cameras also provide capacity for third-party analytics modules, including support for AXIS Camera Application Platform. AXIS Q1922/-E cameras support ONVIF for interoperability between network video products.

Installation is made easy and cost-effective with Power over Ethernet (IEEE 802.3af). AXIS Q1922/-E cameras support H.264 video compression, which reduces bandwidth usage and storage needs. The cameras provide multiple, individually configurable video streams in H.264 and Motion JPEG.



# Range Chart


## Wide range coverage for AXIS Q1922/-E

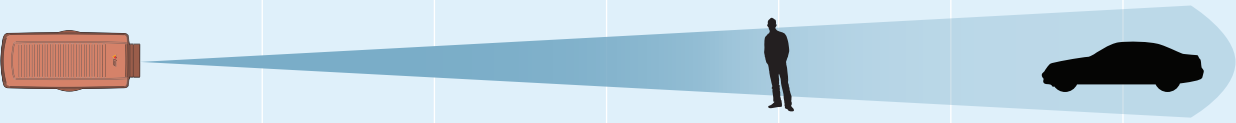	Focal length	Viewing angle	Human: 1.8 x 0.5 m Critical dimension: 0.75 m		Vehicle: 1.4 x 4.0 m Critical dimension: 2.3 m	
						
	mm	Horizontal	meters	yards	meters	yards
<b>Detection (1.5 pixels on target)</b> An observer can see an object	10	57°	320	350	990	1083
	19	32°	580	634	1800	1969
	35	18°	1050	1148	3200	3500
	60	10°	1800	1970	5500	6015
<b>Recognition (6 pixels on target)</b> An observer can distinguish an object	10	57°	80	87	250	273
	19	32°	150	164	440	481
	35	18°	260	284	800	875
	60	10°	440	481	1350	1476
<b>Identification (12 pixels on target)</b> An observer can distinguish a specific object	10	57°	40	44	125	136
	19	32°	75	82	220	241
	35	18°	130	142	400	437
	60	10°	220	240	680	744

According to Johnson's criteria. The ranges vary in different weather conditions.

### Environmental considerations

Johnson's criteria assume ideal conditions. The weather conditions at site will affect the thermal energy emitted from the object and decrease the effective detection range. The detection range in the tables above ideally requires a temperature difference of 2° C between the targeted object and the background. However, the weather conditions such as rain, snow and fog will attenuate the radiated energy from the object since the heat radiation from the object is scattered when it hits particles in the air. To avoid performance and reliability problems always test the camera in the actual environment where it needs to be used.

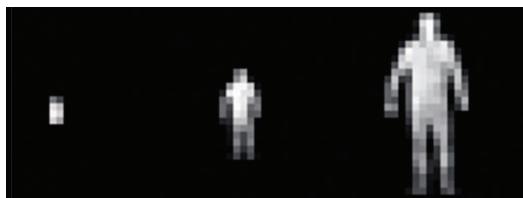

The difference in number of pixels between detection, recognition and identification illustrated with a human target.

### Integration of intelligent applications

The sensor in a thermal camera reacts to differences in thermal energy. Thus, the sensor is less sensitive to changing light conditions, darkness and other challenging conditions. This makes thermal cameras a perfect platform to integrate intelligent video applications to build more efficient 24/7 surveillance systems. Through our Application Development Partner Program Axis can offer the widest range of third party applications available.

Integrated with intelligent video applications such as video motion detection or tripwire, the camera can automatically trigger an alert to the operator. To maximize performance of the application and safeguard reliable operation 6 pixels across the object is recommended and the surrounding environment always needs to be considered.

# Technical specifications – AXIS Q1922/-E Thermal Network Cameras



Camera	
<b>Models</b>	Indoor: AXIS Q1922, 10 mm and 19 mm Outdoor: AXIS Q1922-E, 10 mm, 19 mm, 35 mm and 60 mm
<b>Image sensor</b>	Uncooled Micro bolometer 640x480, pixel size: 17µm, spectral range: 8-14µm
<b>Sensitivity</b>	NETD < 100 mK
Video	
<b>Video compression</b>	H.264 (MPEG-4 Part 10/AVC) Motion JPEG
<b>Resolutions</b>	Sensor is 640x480. Image can be scaled up to 800x600 (D1)
<b>Standard frame rate</b>	Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand Up to 8.3 fps in other countries* <i>*Frame rate above 9 fps may be subject to export control regulations</i>
<b>Video streaming</b>	At least 3 H.264 and Motion JPEG streams using the same palette, simultaneous and individually configured in max. resolution at 30 fps. Controllable frame rate and bandwidth. VBR/CBR H.264
<b>Image settings</b>	Compression, brightness, exposure control, rotation, mirroring of images, text and image overlay, privacy mask, palettes
Audio	
<b>Audio streaming</b>	Two-way, full duplex
<b>Audio compression</b>	AAC LC 8/16 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz Configurable bit rate
<b>Audio input/output</b>	AXIS Q1922: Built-in microphone, external microphone or line input, line output AXIS Q1922-E: External microphone or line input, line output
Network	
<b>Security</b>	Password protection, IP address filtering, HTTPS** encryption, IEEE 802.1X** network access control, digest authentication, user access log
<b>Supported protocols</b>	IPv4/v6, HTTP, HTTPS SSL/TLS**, QoS Layer 3 DiffServ, FTP, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3(MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS. Wide range of PT heads supported (drivers available for download at <a href="http://www.axis.com">www.axis.com</a> ).

\*\*This product includes software developed by the OpenSSL. Project for use in the OpenSSL Toolkit. ([www.openssl.org](http://www.openssl.org))

More information is available at [www.axis.com](http://www.axis.com)



System integration	
<b>Application Programming Interface</b>	Open API for software integration, including the ONVIF specification available at <a href="http://www.onvif.org">www.onvif.org</a> , as well as VAPIX® and AXIS Camera Application Platform from Axis Communications, specifications available at <a href="http://www.axis.com">www.axis.com</a> Support for AXIS Video Hosting System (AVHS) with One-Click Camera connection
<b>Intelligent video</b>	Video motion detection, active tampering alarm, audio detection. Support for AXIS Camera Application Platform enables installation of additional applications
<b>Alarm triggers</b>	Intelligent video and external input
<b>Alarm events</b>	File upload via FTP, HTTP and email; notification via email, HTTP and TCP; external output activation, pre- and post- alarm video buffering
General	
<b>Casing</b>	AXIS Q1922: Zinc chassis AXIS Q1922-E: IP66-rated aluminum casing and a germanium window
<b>Memory</b>	128 MB RAM, 128 MB Flash
<b>Power</b>	Power over Ethernet IEEE 802.3af Class 3 AXIS Q1922: 8 – 20 V DC, max 9 W or 20 – 24 V AC 50-60 Hz, max 14 VA, Power supply not included AXIS Q1922-E: 8 – 20 V DC, max 13 W or 20 – 24 V AC 50-60 Hz, max 20 VA, Power supply not included
<b>Connectors</b>	RJ-45 10BASE-T/100BASE-TX PoE, terminal block for power, terminal block for two configurable inputs/outputs 3.5 mm mic/line in, 3.5 mm line out RS-422/RS-485 AXIS Q1922/-E: Terminal block for heater
<b>Edge storage</b>	SD/SDHC memory card slot (card is not included)
<b>Operating conditions</b>	-40 °C to +60 °C (-40 °F to 140 °F) AXIS Q1922: Humidity 20-80% RH (non-condensing) AXIS Q1922-E: Humidity 10-85% RH
<b>Approvals</b>	EN 55022 Class A, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 50121-4, EN 61000-6-1, EN 61000-6-2, EN 60950-1, FCC Part 15 Subpart B Class A, VCCI Class A ITE, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-27, IEC 60068-2-78, KC Class A AXIS Q1922-E: EN 60950-22, IEC 60068-2-6, IEC 60068-2-27 (shock/vibration), IEC 60529 IP66
<b>Weight</b>	AXIS Q1922: 950 g (2.10 lb.) – 970 g (2.14 lb.) AXIS Q1922-E: 3475 g (7.66 lb.) – 3650 g (8.05 lb.)
<b>Included accessories</b>	Connector kit, Installation Guide, CD with User's Manual, recording software, installation and management tools, Windows decoder 1-user license AXIS Q1922-E: wall mount bracket, 5 m (16 ft.) Ethernet cable

### Dimensions: AXIS Q1922 Thermal Network Camera


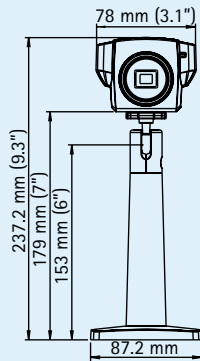


(X)= Lens length (mm/inch)	Lens focal length (mm)
18/0.7	10
21/0.8	19
38/1.5	35
55/2.2	60


### Dimensions: AXIS Q1922-E Thermal Network Camera and wall mount bracket with internal cable channel

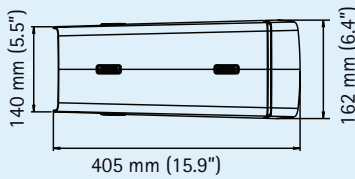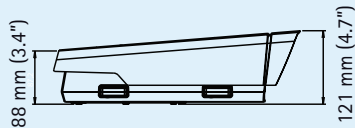

With sunshield



Wall mount arm



Back side of wall mount bracket

### Optional accessories

AXIS PoE Midspan 1-port




YP3040 Pan-Tilt Motor



Lenses



AXIS T8412 Installation Display



For information on AXIS Camera Station and video management software from Axis' Application Development Partners, see [www.axis.com/products/video/software/](http://www.axis.com/products/video/software/)

### Optional mounting accessories for outdoor models

Wall bracket accessories

Adapter plate



Pole mount



Corner mount adapter



Ceiling brackets with ball joint



Column mount with ball joint

